
2023

SUMMIT EDGE

This high-end in-season package is loaded with proven technical features.

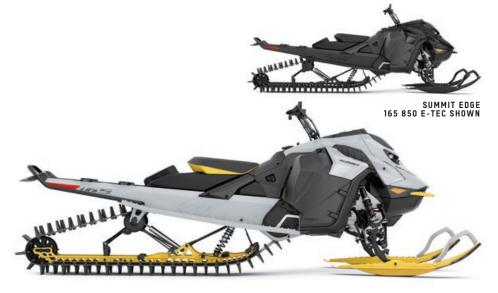

SUMMIT EDGE 165 850 E-TEC SHOWN

// WHAT'S NEW

- REV® Gen5 platform
- tMotion™ X rear suspension
- Premium LED headlights
- PowderMax† X-Light 3 in. with FlexEdge† available
- Narrower running boards and body work

// PACKAGE HIGHLIGHTS

• Rotax® 850 E-TEC® engine

ROTAX ENGINE

- High-quality HPG† shock package
- RAS™ 3 front suspension with lightweight ski spindle and revised ski stopper
- E-TEC SHOT™ starter standard

850 E-TEC

- \bullet Deep-snow running boards with large openings
- Compact and lightweight deep-snow seat
- Pilot™ DS 3 skis
- Belt monitoring system

Engine details	Liquid-cooled, two-stoke, eRAVE™
Horsepower	165
Cylinders – Displacement	2 - 849 cc
Bore - Stroke (mm)	82 - 80.4
Carburation	E-TEC direct injection with additional booster injectors
Fuel type – Octane	Premium unleaded – 91
Fuel tank (L/US gal)	36/9.5
Oil tank capacity (L/qt)	3.4/3.6
POWERTRAIN Drive clutch Driven clutch	pDrive™ with clickers QRS Vent Plus
Drive clutch	·
Drive clutch Driven clutch	QRS Vent Plus
Drive clutch Driven clutch Drive sprocket pitch	QRS Vent Plus
Drive clutch Driven clutch Drive sprocket pitch DRY WEIGHT	QRS Vent Plus 89 mm/3.5 in.

DRY WEIGHT	
Dry weight	445 lb (154 in.)
	448 lb (165 in.)
	454 lb (175 in.)
DIMENSIONS	
Overall vehicle length	3,188 mm/125.5 in. (154 in.)
	3,299 mm/129.9 in. (165 in.)
	3,454 mm/136 in. (175 in.)
Overall vehicle width	1,080 to 1,110 mm/42.5 to 43.7 in.
Overall vehicle height	1,395 mm/54.9 in.
Ski stance	930 mm/36 in. adjustable
Track	PowderMax Light with FlexEdge:
(Length x Width x Profile)	154 x 16 x 2.5 in.
	PowderMax X-Light with FlexEdge:
	154 x 16 x 3.0 in.
	165 x 16 x 3.0 in.
	175 x 16 x 3.0 in.

COLOR Catalyst Grey / Neo Yellow

SUSPENSION		
Front suspension	RAS 3	
Front shock	HPG	
Front suspension travel	215 mm/8.5 in.	
Rear suspension	tMotion	
Center shock	HPG	
Rear shock	HPG	
Rear suspension travel	264 mm/10.4 in.	

FEATURES

REV Gen5
Pilot DS 3
Deep-snow compact and lightweight
Tapered U-shaped aluminum with J-hooks/Low grab handle
165 mm/6.5 in.
SHOT
RER™
Brembo [†]
Standard
4.5 in. digital
Optional
Square 3/8 in. – 4 in.
Std/Std

2023 SUMMIT EDGE

// FEATURE HIGHLIGHTS



1 REV Gen5 deep-snow platform

Lighter, narrower and more refined for improved technical riding and a next-level experience that's all about spending unforgettable days in the deep stuff.



2 Rotax 850 E-TEC engine

Incredible power and unmatched dynamic response with exclusive E-TEC direct-injection technology. Exceptional, proven durability and excellent fuel and oil economy.



3 Short tunnel

Shorter tunnel length without snowflap for greater deep-snow capabilities with more clearance and lighter overall weight. Standard rear fender with LinQ-ready attachment points.



SUMMIT EDGE 165 850 E-TEC SHOWN



4 High-quality HPG shock package

Extremely capable high-pressure gas shocks by KYB.†



5 tMotion X rear suspension

With 90% new parts, this complete redesign increases capacity and reduces weight by 2.5 lbs.



6 E-TEC SHOT starter

Push-button start with almost no added weight. Uses energy stored in the lightweight ultracapacitor to turn the magneto and with E-TEC technology, start the engine.



