

250 Pacific Explorer HT



RPM	MPH	GPH	MPG
600	3.5	0.555	6.31
1000	5	1.075	4.65
1500	6.95	1.75	3.97
2000	8.45	2.65	3.19
2500	9.45	4.2	2.25
3000	12.1	6.05	2
3500	16.05	7.85	2.04
4000	22.55	9.4	2.4
4500	29.85	11.1	2.69
5000	33.4	13.65	2.45
5500	37.95	23.6	1.61
6000	43.2	27.65	1.56

50	
40	
30	
20	
10	
0	600 1K 2K 3K 4K 5K 6K

250 PACIFIC EXPLORER HT	TEST DATE 7/19/23
Length	25'11"
Beam	102"
Dry Weight (Boat Only)	6,200 lbs
Maximum HP	450
Fuel Capacity	145 gallons
Weight as tested (Approximate)	7,390 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

HONDA BF150DXDA/BF150DXCDA	
Horsepower	150 Twins HP
Displacement	144 CID
Dry Weight (Engine)	480 lbs
Gear Ratio	2.14:1
Mounting Height	#2

PROPELLERS	
Material/Blades	SS/3
Series	Titan
Diameter/Pitch	14 7/5x17
Honda Part #	58133-zy3-A17HR / 58133-zy3-B17HR

TEST CONDITIONS	
Number of People	2
Air Temperature (Fahrenheit)	75° F
Elevation	1,275 ft.
Wind Velocity	5-10 mph



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



270 Pacific Explorer HT



RPM	MPH	GPH	MPG
600	2.5	0.7	3.57
1000	5.5	1.45	3.79
1500	7.5	2.6	2.88
2000	9	4.15	2.16
2500	10.5	6.4	1.64
3000	15.5	8.15	1.9
3500	23.5	10.15	2.32
4000	28.5	13.35	2.14
4500	33.5	16.95	1.98
5000	37	22.15	1.67
5500	40.5	27	1.5
6000	46	36.65	1.26

50	
40	
30	
20	
10	
6	600 1K 2K 3K 4K 5K 6K
	-□-MPH -□-GPH -□-MPG

270 PACIFIC EXPLORER HT	TEST DATE 7/8/2020
Length	30'4"
Beam	102"
Dry Weight (Boat Only)	6,640 lbs
Maximum HP	500
Fuel Capacity	190 gallons
Weight as tested (Approximate)	7,712 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety	& test Equipment
---	------------------

YAMAHA F200XCA / LF200XCA	
Horsepower	200 Twins HP
Displacement	2.8L
Dry Weight (Engine)	492 lbs
Gear Ratio	1.86:1
Mounting Height	#2

PROPELLERS	
Material/Blades	SS/3
Series	Reliance
Diameter/Pitch	14 1/2×15
Yamaha Part #	68F459701000

TEST CONDITIONS	
Number of People	4
Air Temperature (Fahrenheit)	66° F
Elevation	1,275 ft.
Wind Velocity	5-10 mph




Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



270 Pacific Explorer HT



RPM	MPH	GPH	MPG
600	3	1.5	3.67
1000	6.5	2.4	3.13
1500	9	3.8	2.34
2000	10.5	6.85	1.53
2500	15	9.7	1.55
3000	18.5	12.15	1.55
3500	30.25	15.45	1.96
4000	34.75	19.6	1.77
4500	39	25.15	1.55
5000	43	32.05	1.34
5500	48	41.4	1.16
6000	52	47.45	1.10

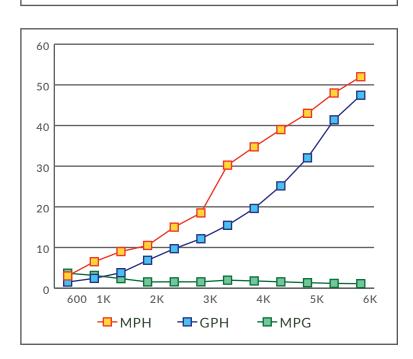

270 PACIFIC EXPLORER HT	TEST DATE 5/28/20
Length	30'4"
Beam	102"
Dry Weight (Boat Only)	6,640 lbs
Maximum HP	500
Fuel Capacity	190
Weight as tested (Approximate)	7,712 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

YAMAHA F250XB / LF250XB	
Horsepower	250 Twins HP
Displacement	2.8 L
Dry Weight (Engine)	489 lbs
Gear Ratio	1.86:1
Mounting Height	#2

PROPELLERS	
Material/Blades	SS/3
Series	Reliance Series
Diameter/Pitch	15 1x2x17
Yamaha Part #	N/A

TEST CONDITIONS	
Number of People	3
Air Temperature (Fahrenheit)	66 ° F
Elevation	1,275 ft.
Wind Velocity	5-10 mph




Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity. elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



270 Pacific Explorer HT



RPM	MPH	GPH	MPG
1000	6.6	2	3.3
1500	7.65	3.2	2.39
2000	9.5	5.1	1.86
2500	12.15	6.7	1.81
3000	18	9.2	1.96
3500	24.25	10.8	2.25
4000	28.65	14.8	1.94
4500	33.5	17.2	1.95
5000	37.5	20.7	1.81
5500	40.8	29.4	1.39
5800	44.3	31.7	1.4

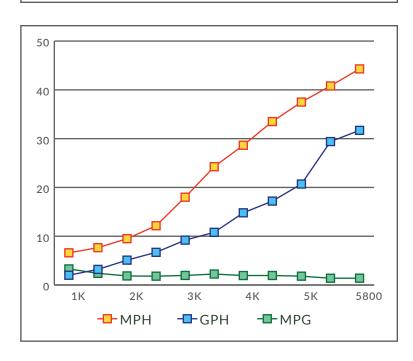

270 PACIFIC EXPLORER HT	TEST DATE 9/21/20
Length	30'4"
Beam	102"
Dry Weight (Boat Only)	6,640 lbs
Maximum HP	500
Fuel Capacity	190
Weight as tested (Approximate)	7,500 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

MERCURY 200XL 4S DTS / 200CXL 4S DTS	
Horsepower	200 Twins HP
Displacement	4.8 L
Dry Weight (Engine)	475 lbs
Gear Ratio	1.85:1
Mounting Height	#2

PROPELLERS	
Material/Blades	SS/3
Series	ENERTIA
Diameter/Pitch	15.0 x 15
Mercury Part #	48-898990A46 / 48-898991A46

TEST CONDITIONS	
Number of People	3
Air Temperature (Fahrenheit)	70° F
Elevation	1,275 ft.
Wind Velocity	5-10 mph




Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity. elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



270 Pacific Explorer



RPM	MPH	GPH	MPG
1000	5.6	1.8	3.1
1500	7.3	3.0	2.5
2000	9.0	4.9	1.9
2500	12.0	6.1	2.0
3000	18.0	8.6	2.1
3500	25.2	10.8	2.3
4000	29.9	13.2	2.3
4500	34.9	16.4	2.1
5000	39.5	19.9	2.0
5500	43.3	23.8	1.8
6000	46.6	30.1	1.5
6400	49.3	45.8	1.1

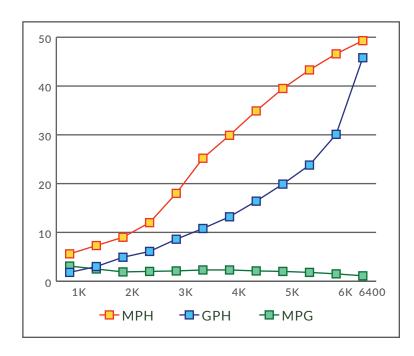

270 PACIFIC EXPLORER	TEST DATE 11/24/20
Length	30'4"
Beam	102"
Dry Weight (Boat Only)	6,640 lbs
Maximum HP	500
Fuel Capacity	190
Weight as tested (Approximate)	7,712 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

HONDA BF250 / BF250	
Horsepower	250 Twins HP
Displacement	3.6 L
Dry Weight (Engine)	611 lbs
Gear Ratio	2.1:1
Mounting Height	#2

PROPELLERS	
Material/Blades	SS/3
Series	Saturn Series
Diameter/Pitch	15 1/2 x 17
Honda Part #	58133-ZY3-A17AH

TEST CONDITIONS	
Number of People	2
Air Temperature (Fahrenheit)	40 ° F
Elevation	1,290 ft.
Wind Velocity	0-5 mph



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.