



## 220 Ocean Pro ET HT



### 220 OCEAN PRO ET HT

TEST DATE 9/12/15

Length	24'8"
Beam	102"
Dry Weight (Boat Only)	3200 lbs
Maximum HP	250
Fuel Capacity	100
Weight as tested (Approximate)	4,351 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

### HONDA BF225

Horsepower	250 HP
Displacement	3.5 L
Dry Weight (Engine)	589 lbs
Gear Ratio	1.86:1
Mounting Height	#1

### PROPELLERS

Material/Blades	SS/3
Series	Solas
Diameter/Pitch	15 3/4x15
Honda Part #	N/A


### TEST CONDITIONS

Number of People	4
Air Temperature (Fahrenheit)	70° F
Elevation	1,630 ft.
Wind Velocity	2 mph

RPM	MPH	GPH	MPG
1000	5	.7	7.1
1500	6	1.2	5
2000	7	2.2	3.2
2500	10	2.6	3.8
3000	14	4.0	3.5
3500	20	5.3	3.8
4000	25	7.3	3.4
4500	30	8.7	3.4
5000	34	12.1	2.8
5500	37	15.0	2.5
6000	43	21.7	2.0



**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

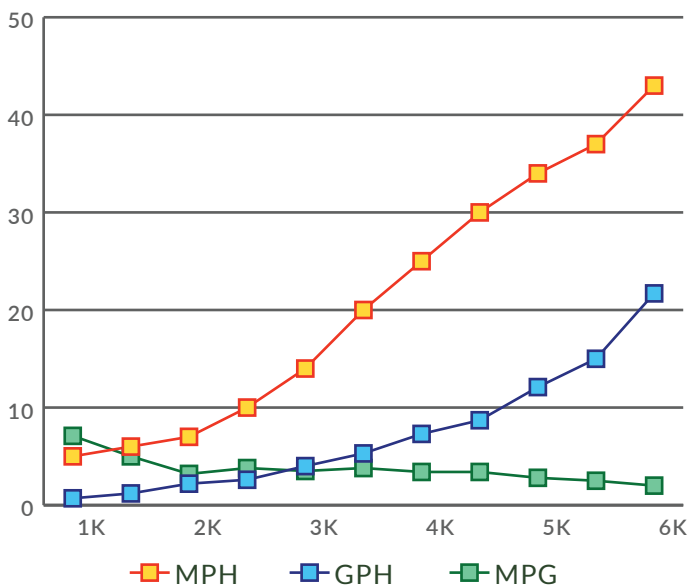



## 220 Ocean Pro ET HT



### 220 OCEAN PRO ET HT

TEST DATE 1/16/16

Length	24'8"
Beam	102"
Dry Weight (Boat Only)	3200 lbs
Maximum HP	250
Fuel Capacity	100
Weight as tested (Approximate)	4,500 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

### MERCURY 225 VERADO

Horsepower	225 HP
Displacement	2.6 L
Dry Weight (Engine)	668 lbs
Gear Ratio	1.85:1
Mounting Height	#1


### PROPELLERS

Material/Blades	SS/3
Series	Solas
Diameter/Pitch	14x17
Mercury Part #	N/A

### TEST CONDITIONS

Number of People	2
Air Temperature (Fahrenheit)	45° F
Elevation	N/A ft.
Wind Velocity	N/A mph

RPM	MPH	GPH	MPG
1000	5.2	1	5.20
1500	7	1.7	4.12
2000	78.7	2.7	3.22
2500	12.6	4	3.15
3000	18.1	5.4	3.35
3500	23.5	7.3	3.22
4000	28.7	9.4	3.05
4500	33.5	12.4	2.70
5000	37.5	15.5	2.41
5500	42	20.8	2.01
6000	45.7	22.8	2.00

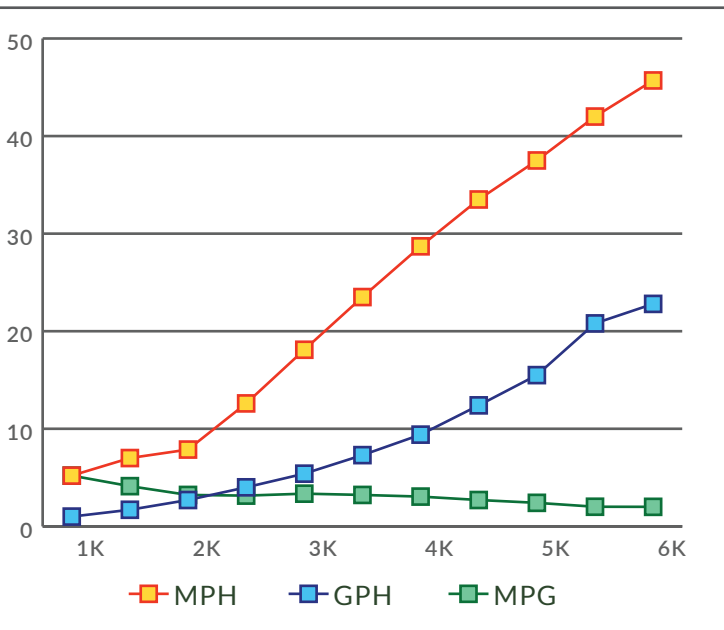

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



## 240 Ocean Pro ET HT



### 240 OCEAN PRO ET HT TEST DATE 7/18/23

Length	26'8"
Beam	102"
Dry Weight (Boat Only)	3,600 lbs
Maximum HP	350
Fuel Capacity	100
Weight as tested (Approximate)	4,509 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

### YAMAHA F300XSB

Horsepower	300 HP
Displacement	245.6 CID
Dry Weight (Engine)	639 lbs
Gear Ratio	2.08:1
Mounting Height	#1


### PROPELLERS

Material/Blades	SS/3
Series	Solas Rubex
Diameter/Pitch	15 1/2 X 17
Part #	N/A

### TEST CONDITIONS

Number of People	3
Air Temperature (Fahrenheit)	85° F
Elevation	1,300 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
600	4.4	0.65	6.77
1000	6.45	1.3	4.96
1500	8.3	2.05	4.05
2000	10.85	3.55	3.06
2500	14.8	4.85	3.05
3000	22.35	5.95	3.76
3500	27.55	7.8	3.53
4000	32.5	10.75	3.02
4500	36.75	13.6	2.70
5000	40.9	17.15	2.38
5500	45.4	23.1	1.97
WOT	47.65	25.45	1.87

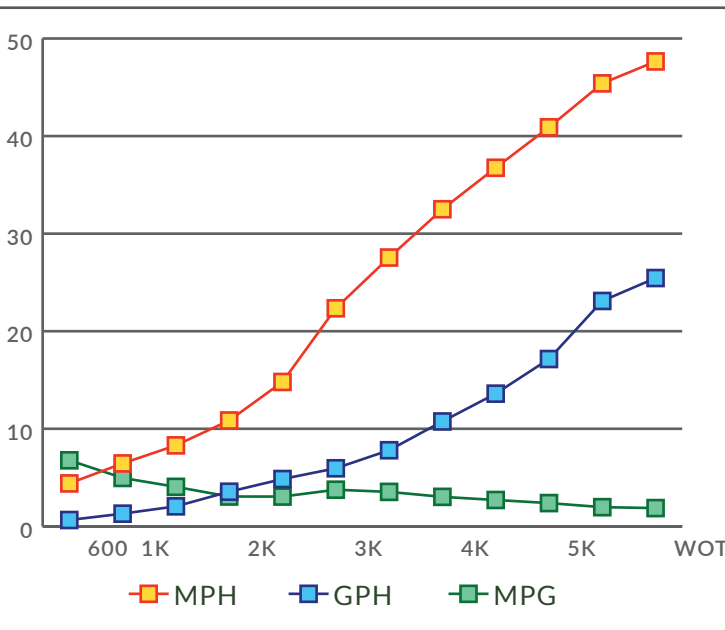

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



## 240 Ocean Pro ET HT



### 240 OCEAN PRO ET HT

TEST DATE 8/27/22

Length	26'8"
Beam	102"
Dry Weight (Boat Only)	3,600 lbs
Maximum HP	350
Fuel Capacity	100
Weight as tested (Approximate)	4,509 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

### SUZUKI

Horsepower	300 HP
Displacement	245.6 CID
Dry Weight (Engine)	639 lbs
Gear Ratio	2.08:1
Mounting Height	#1

### PROPELLERS

Material/Blades	SS/3
Series	Solas Rubex
Diameter/Pitch	15 X 21
Part #	N/A


### TEST CONDITIONS

Number of People	3
Air Temperature (Fahrenheit)	75° F
Elevation	1,300 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
690	3.25	0.55	5.91
1000	5.3	1.03	5.15
1500	6.95	2.03	3.42
2000	8.6	2.43	3.54
2500	11	3.99	2.76
3000	14.3	5.12	2.79
3500	21.1	6.3	3.35
4000	28.8	8.7	3.31
4500	34.4	12.8	2.69
5000	39.4	15.9	2.48
5500	43.5	20.5	2.12
5875	46.5	24.5	1.9



**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

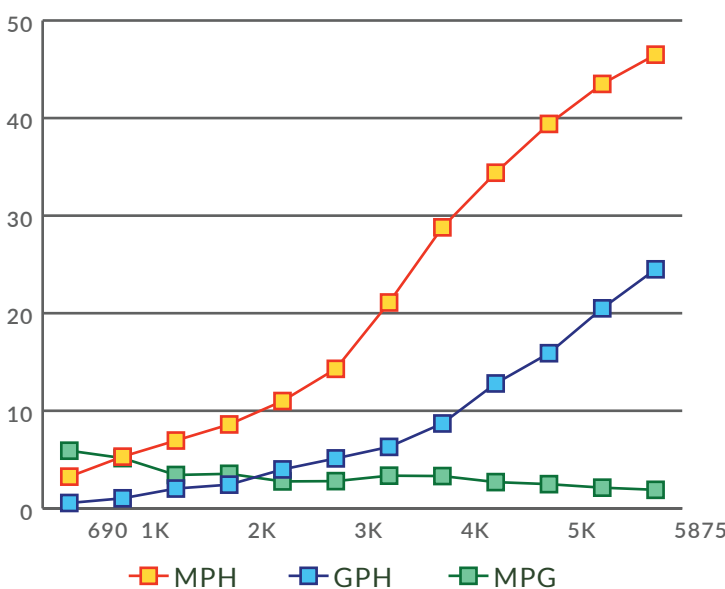



## 240 Ocean Pro ET HT



### 240 OCEAN PRO ET HT TEST DATE 8/27/22

Length	26'8"
Beam	102"
Dry Weight (Boat Only)	3,600 lbs
Maximum HP	350
Fuel Capacity	100
Weight as tested (Approximate)	6,000 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

### HONDA BF350AXDA

Horsepower	350 HP
Displacement	5.0L
Dry Weight (Engine)	754 lbs
Gear Ratio	1.79:1
Mounting Height	#1

### PROPELLERS

Material/Blades	SS/3
Series	Lexor Plus
Diameter/Pitch	16 X 18
Part #	58130-ZVPA-C011-M1

### TEST CONDITIONS

Number of People	6
Air Temperature (Fahrenheit)	74° F
Elevation	10 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
650	4.75	0.62	7.69
1000	6.09	1.15	5.28
1500	8.68	2.24	3.87
2000	10.74	3.39	3.17
2500	16.33	5.18	3.15
3000	23.76	6.96	3.41
3500	29.38	8.55	3.44
4000	34.36	11.66	2.95
4500	39.53	16.82	2.35
5000	43.85	20.86	2.10
5500	48.42	27.27	1.78
WOT	51.04	30.66	1.66



**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

